




1
Grade Beam
Scale $\frac{3}{4}$: 1"

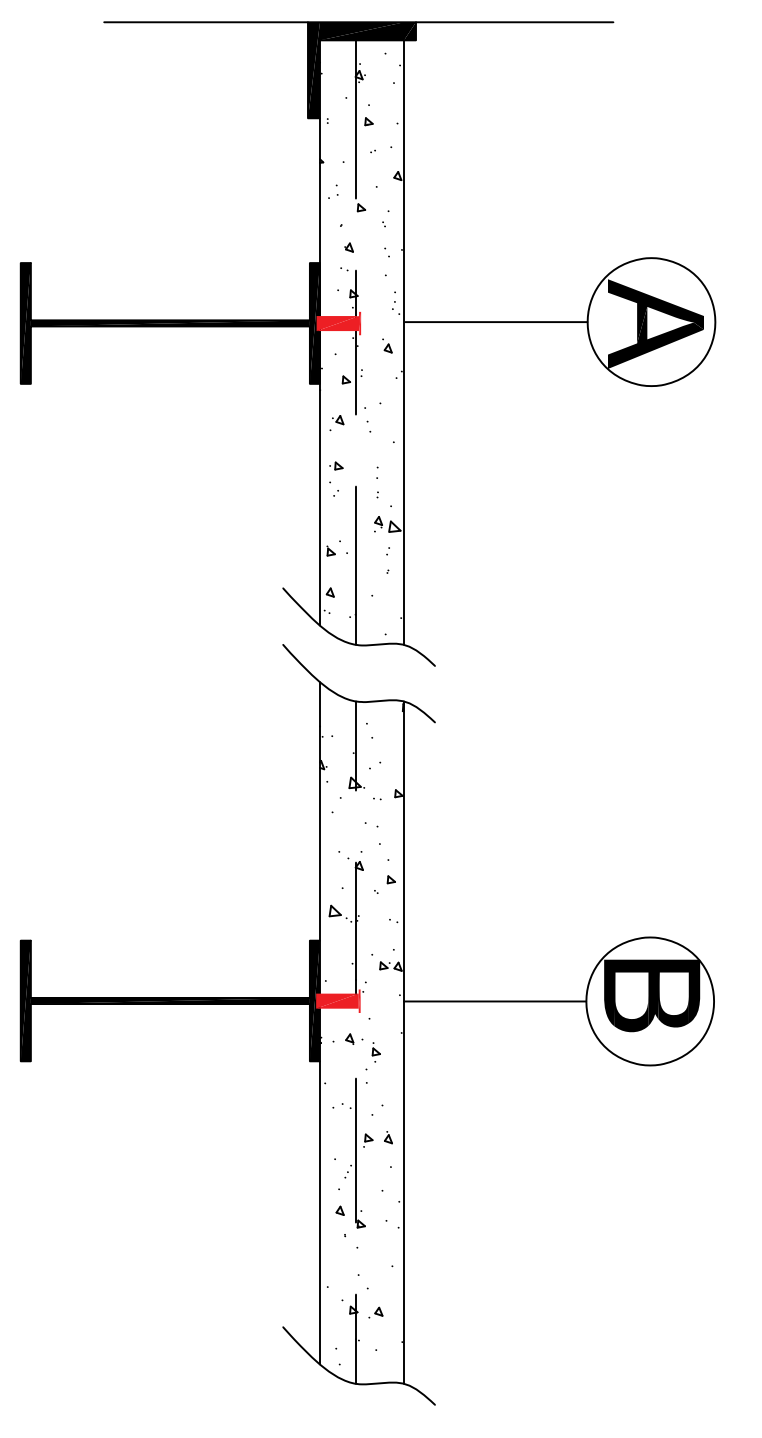


2
Floor Joist Connection
Scale $\frac{3}{4}$: 1"

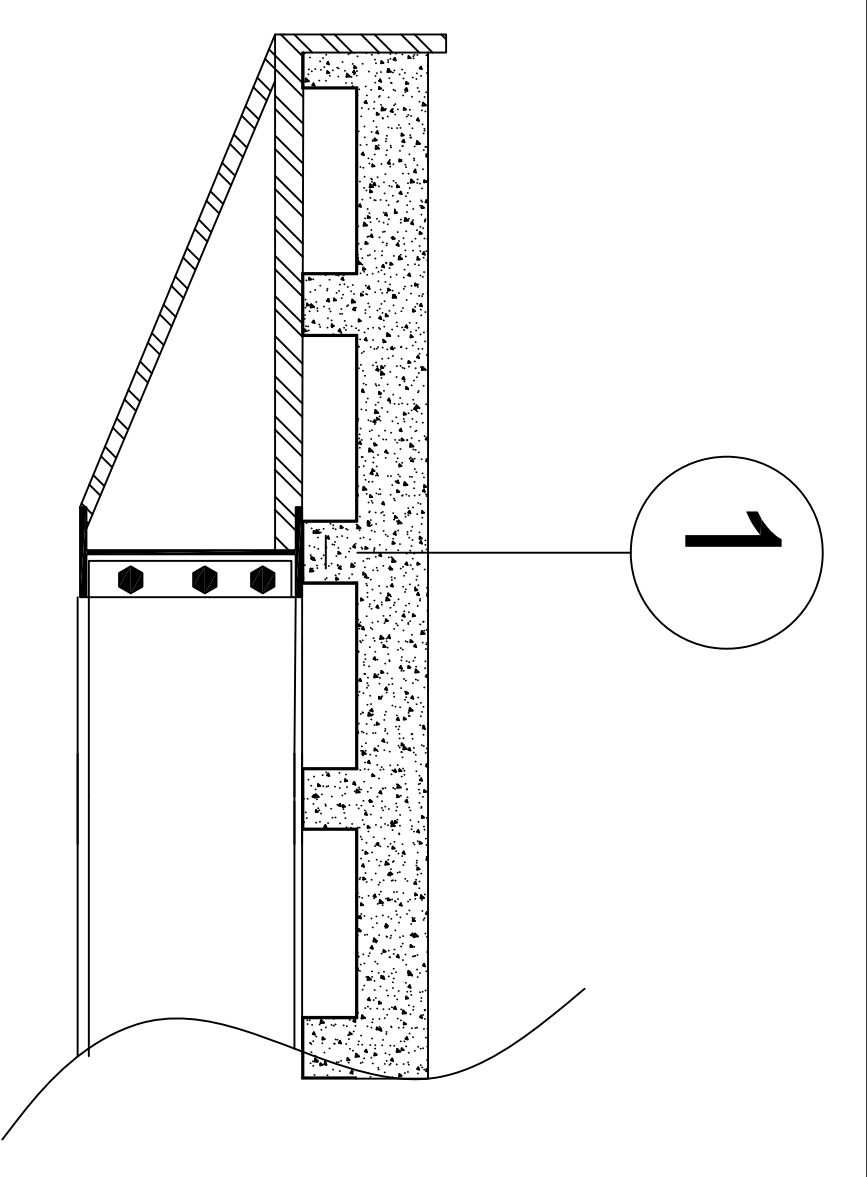


3
Floor Beam Connection
Scale $\frac{3}{4}$: 1"

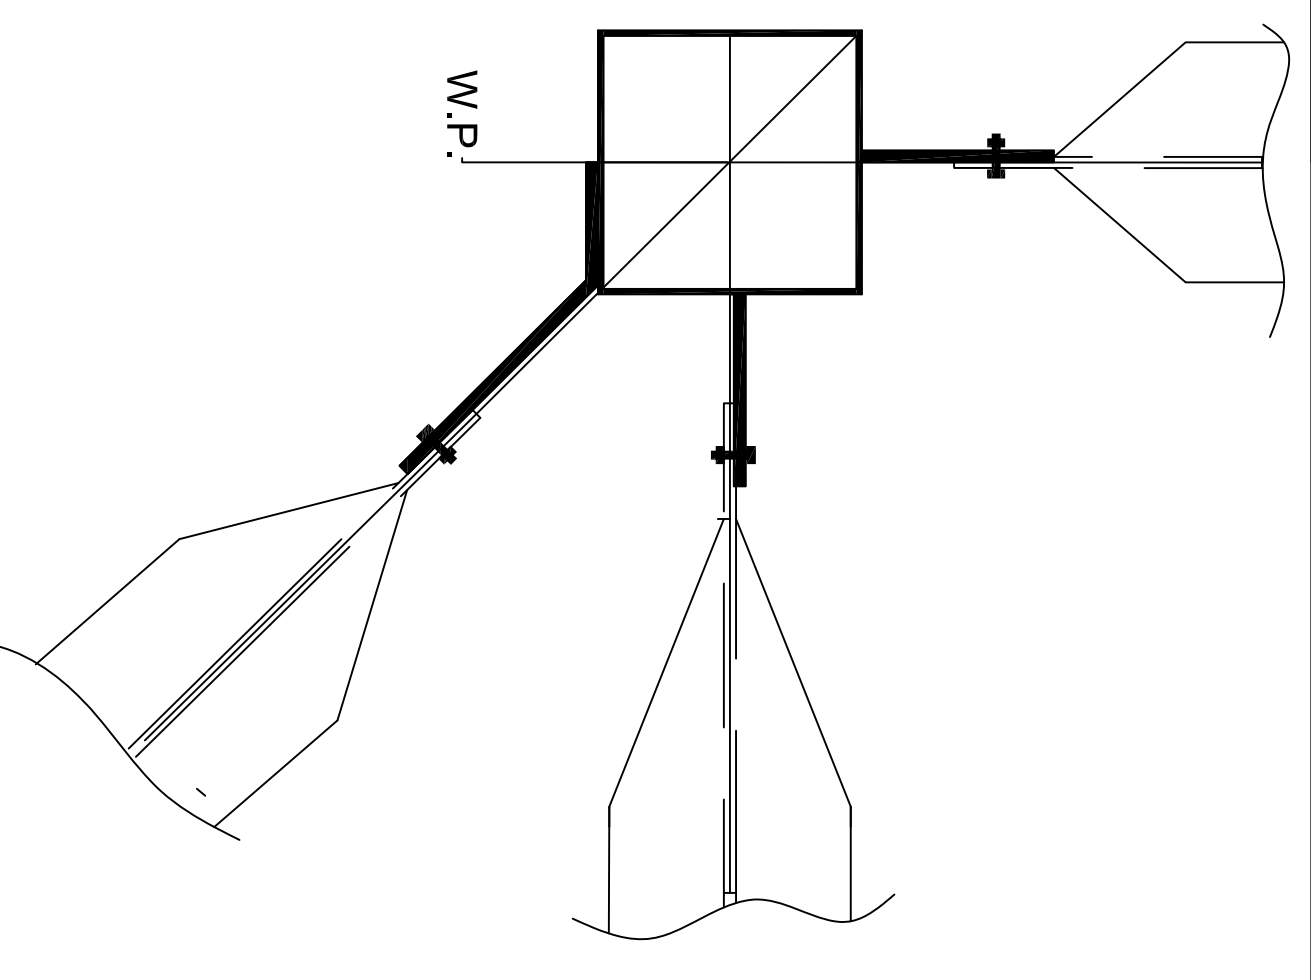


4
Corner Column Connection
Scale $\frac{3}{4}$: 1"

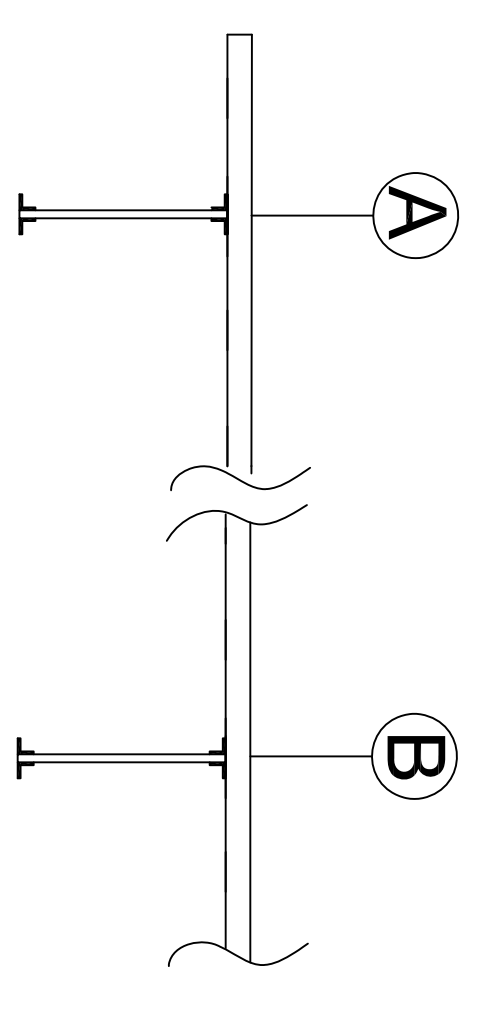

6
Roof Joist Connection
Scale $\frac{3}{4}$: 1"

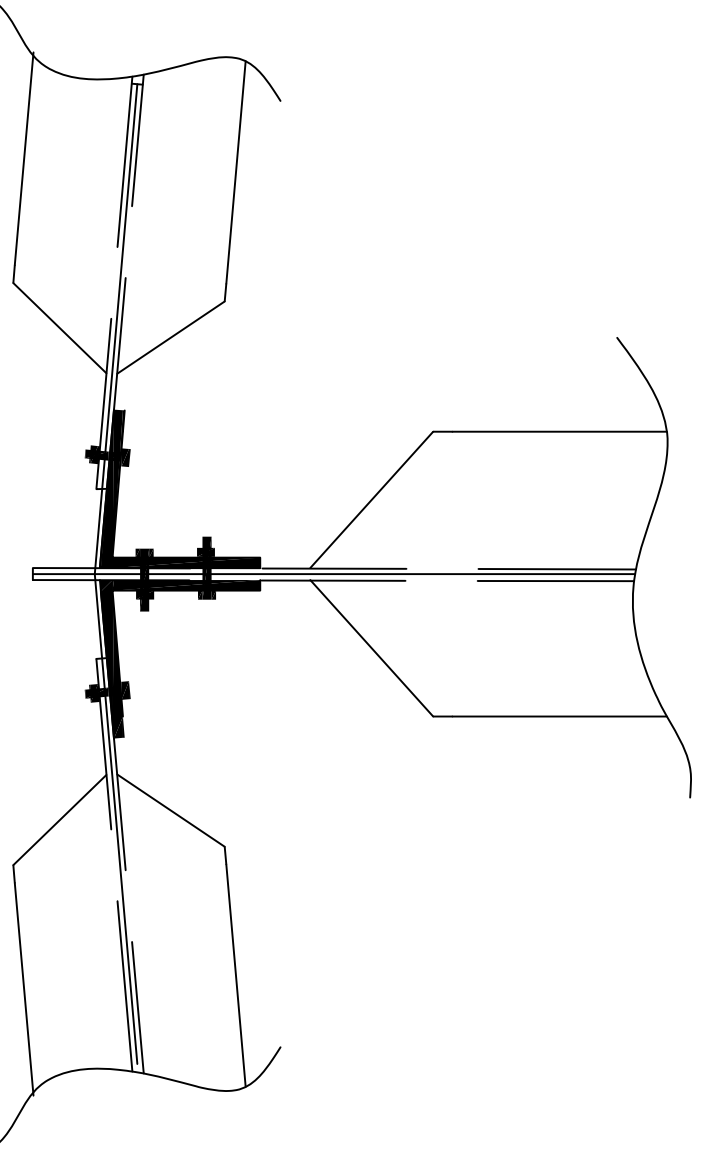

5
Cantilever Girder Connection
Scale $\frac{3}{4}$: 1"

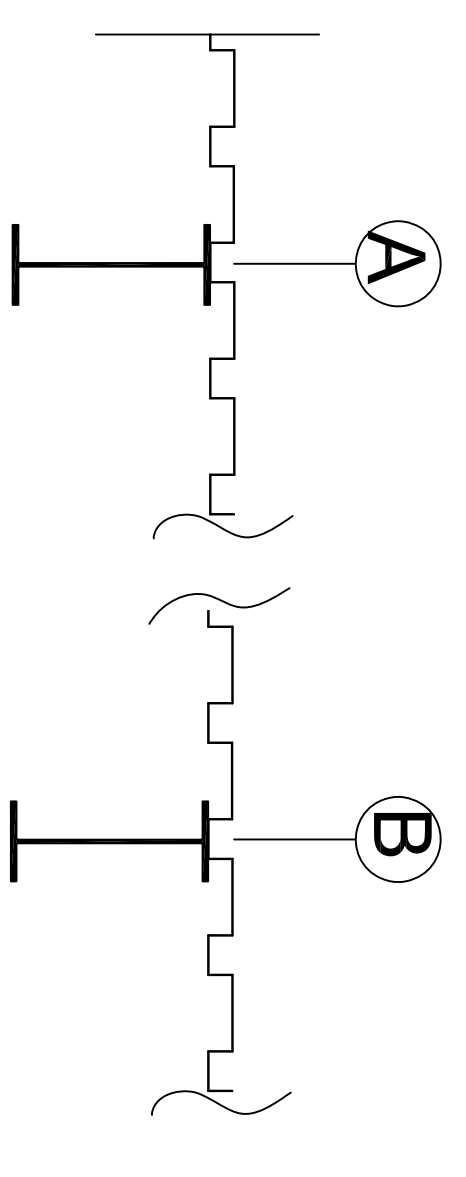




7
Roof Girder Connection
Scale $\frac{3}{4}$: 1"

Column Schedule

Col.	Length	Width	Thick.
C1	8"	8"	$\frac{1}{4}$ "
C2	6"	6"	$\frac{3}{16}$ "
C3	5.5"	5.5"	$\frac{3}{16}$ "

Foundation Schedule

Col.	Length	Width	Thick.	Reinf.
F1	7'-0"	7'-0"	1'-0"	#7@12"
F2	5'-0"	5'-0"	1'-0"	#6@12"
F3	3'-6"	3'-6"	1'-0"	#5@12"

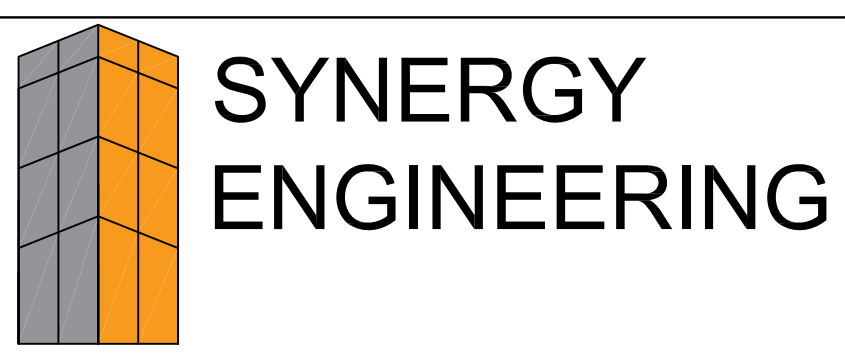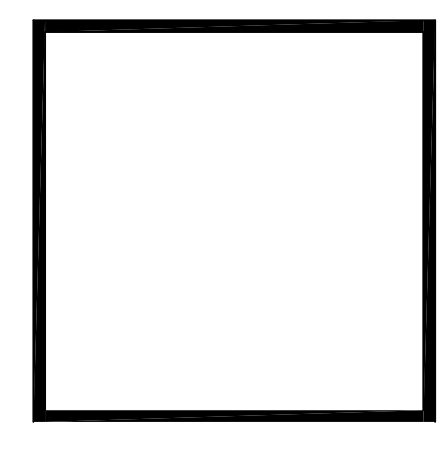

JOB NO:	1
DATE:	2016/10/4
SCALE:	1":10'
DRAWER 1:	Abdulaziz Alajmi
DRAWER 2:	
DRAWER 3:	
DRAWER 4:	
CHECKER 1:	Phoo Myat Sandy Maung
CHECKER 2:	Yijie Gao

JOB NAME: Framing Plan LOCATION: FLAGSTAFF, AZ
PROJECT:
INTERNATIONAL PAVILION EXPANSION
STRUCTURAL PLAN

REVISIONS			
NO.	DESCRIPTION	DATE:	BY:
1	Revision for 50%	10/4/2016	YG
2	Revision for final framing plan	10/25/2016	PS
3			
4			
5			
6			
7			

DRAWING:

S04

SHEET NO: 4 OF: 5