

Go Baby Go

Background Report

Team 22
Alwaleed Alhamra
Asrar Alkhabbaz
Fawaz Almutairi
Sultan Almutairi
Eric Trieu

Fall 2016-17



Project Sponsor: Dr. Sarah Oman
Faculty Advisor: Dr. Sarah Oman
Sponsor Mentor: Dr. Sarah Oman
Instructor: Dr. David Trevas

DISCLAIMER

This report was prepared by students as part of a university course requirement. While considerable effort has been put into the project, it is not the work of licensed engineers and has not undergone the extensive verification that is common in the profession. The information, data, conclusions, and content of this report should not be relied on or utilized without thorough, independent testing and verification.

University faculty members may have been associated with this project as advisors, sponsors, or course instructors, but as such they are not responsible for the accuracy of results or conclusions.

ABSTRACT

This background report discusses the background, requirement and existing design components of the 'Go Baby Go' project. The research program suggests for certain modifications to further improve the performance of the ride-on car developed under this project. The project is to design a device that assists a child with a mobility handicap, in which an option is to retrofit a ride-on-car. The client has a list of requirements that are weighted based on importance and need to be met for the project. This work analyses are already available designs and considers the new customer requirements to provide a new design that is cost effective and more comfortable to the special kids. Various aspects related to the ride-on car of this program is discussed from a managerial point of view and modifications are suggested. Existing designs by the 'Go Baby Go' club assists in the design the team decides on.

Table of Contents

DISCLAIMER	i
ABSTRACT	ii
1 BACKGROUND	1
1.1 Introduction.....	1
1.2 Project Description	1
1.3 Original System.....	1
1.3.1 Original System Structure	1
1.3.2 Original System Operation.....	1
1.3.3 Original System Performance	1
1.3.4 Original System Deficiencies.....	2
2 REQUIREMENTS.....	2
2.1 Customer Requirements.....	2
2.2 House of Quality (HoQ)	2
3 EXISTING DESIGN.....	3
3.1 Design Research.....	3
3.2 System Level	3
3.2.1 Existing Design #1: Ride-On-Car	3
3.2.2 Existing Design #2: Playpen Harness	3
3.2.3 Existing Design #3: The Original Plasma Car.....	4
3.3 Subsystem Level.....	4
3.3.1 Subsystem #1: Safety.....	5
3.3.2 Subsystem #2: Steering	6
3.3.3 Subsystem #3: Acceleration.....	7
4 REFERENCES	8

Table of Figures

Figure 1 HoQ	2
Figure 2 Plasma Car.....	4
Figure 3 Roll cage on a ride-on-car with PVC pipes.....	5
Figure 4 Body Side Support.....	5
Figure 5 Push Buttons.....	6
Figure 6 T-Bar Handle Control	6
Figure 7 A diagram of how a joystick connect into the car	7
Figure 8 Joystick in a ride-on-car	7

1 BACKGROUND

1.1 Introduction

'Go Baby Go' program is a research program started in 2012 by Dr. Cole Galloway to support the toddlers and children who have disability [2]. It is a partial charity program. The aim of the 'Go Baby Go' program is to provide mobility to these children at a tender age. Kids having disability finds it hard to manage with the wheelchairs and needs some mechanism to move with ease. 'Go Baby Go' program is meant to develop ride-on-cars that are specially designed for kids [3]. This project aims to provide assistance to the mentioned research program and to further simplify the ride-on-car design so as to make it more cost effective and to extend its reach to more and more kids in need.

1.2 Project Description

This project mainly aims on two different aspects to further simplify the ride-on-car design. The first aspect is to improve the control system. For example, sensors can play a role with the controller for the car to move from a specific distance and to allow it to stop. Advance control features can be added to provide the safest driving conditions to make it easier to operate. The cost can be reduced through proper selection of design methods. The second aspect is to further improve upon the seat comfortability. The seat can be designed to be adjustable and adapt as per the kids' physique. It must provide maximum comfort and at the same time must be liked by the kid that will be using the car.

1.3 Original System

1.3.1 Original System Structure

The original system is just a slight modification of a commercially available toy car. The existing design improves the ruggedness and control of the already available toy car. The prime objective of the program is to develop a cost effective vehicle and hence most of the improvements are not carried out in the presently available cars [4]. Few compulsorily required features are carefully added to the system.

1.3.2 Original System Operation

The 'Go Baby Go' program has a base model to its ride-on-car and does a small modification with respect to the kid in need (depending upon the extent of disability). In certain cases, a child with disability may have control over hand but not legs and vice-versa. In such situations the vehicle design is made with respect to the kid's capability to operate. Some of the designs are switchable to different modes depending upon the child's actual need.

1.3.3 Original System Performance

The performance of the available system is quite good and is going well with the need. The available system of the design suits well with the kids need, however, the technology is not utilized to its fullest and further comforting the kids without much cost implications [5]. The available

system can operate in different modes with the slight design change. The available operating modes are sitting mode, standing mode, advanced standing mode, walking mode and many others. The design gives a lot of emphasis to the safety in operation and makes sure that the kid using the car may not get hurt in any case. The present system performance is very good and is in line with the kid's need.

1.3.4 Original System Deficiencies

The system at present is satisfactory, cost effective and simple to use. However, a lot of further modifications can be done to further improve the system performance. For example, the present system does not have power control and the kids have to do a lot of steering adjustment drive the vehicle. The seat in the ride on car is un-adjustable and all the kids have to adjust themselves to it. The present vehicle has no monitoring for obstruction.

2 REQUIREMENTS

2.1 Customer Requirements

The customer requirements are mainly to design a car that is adaptive in nature and suit to kids having different physique. The toy car must be flexible to operate in different modes. It must be highly durable and take loads for a longer time [1]. A low-cost vehicle and the cost must be low to the maximum extent, making it affordable for the child's parents to afford. Vehicle aesthetic is much important for the kids to get attracted and start playing with it. While safety is the most prior aspect for the kid using the car, it must safe to operate.

2.2 House of Quality (HoQ)

While designing for the work, a complete attention is required on quality and safety of the ride-on car. The design must be such a way that, it can go in line with the customer's need. After going through the customer needs, the design team must figure out certain crucial areas and focus on them to get the required quality. Emphasis must be put on and fine tuning must be made until the required quality is met. Any compromise with the quality will ultimately lead to unpredicted failures and will totally mess up the situation. Proper weight has to be given to each of the customer's need and design work has to be carried out accordingly.

Customer Requirement	Weight
1. Low cost	3
2. Ease of Assembly	3
3. Safety	5
4. Aesthetic	2
5. Acceleration/Deceleration Control	4
6. Comfortability	4
7. Lightweight	2
8. Durable	4

Figure 1 HoQ

3 EXISTING DESIGN

3.1 Design Research

The existing designs under the 'Go Baby Go' program involve an in-depth analysis on the actual requirement and listing the possible solutions. Each of the listed solutions are further analyzed to select the option that best suits the requirements [5]. The selected option is then studied for the practical feasibility. A particular design is selected after a serious study and testing.

3.2 System Level

Research in the area of providing power cars to kids started from late 1980s [1]. Over the period of time with the advent of modern technology many modifications have been brought about. The table below shows the development in the design area

Table 1. Design Research Over Time [1]

Year	Car Design
1980	Adapting Power Chairs for young children
1990-95	The Cooper car
1995-1999	Go BOT
2000	The standard Paediatric Power Chair
2005-2010	Mobile Robots
2010-2015	Go Baby Go Modified Ride-on car

Technology has played its role over time and a lot of modifications have happened. However, in recent times with the beginning of 'Go Baby Go' program, much of the emphasis has been put on the cost control and simple design. The objective of the programs is to provide low cost and maximum comfort vehicles to the kids. Therefore, certain compromises have been made with the features to make it available to maximum kids with disabilities as possible.

3.2.1 Existing Design #1: Ride-On-Car

The ride-on-cars are modified due to the child's disabilities and parent's requirements. The modifications differ from one kid to another. Some ways that the cars were modified was playing around with the wheels, change the steering wheels, cushions, safety parole system, and much more. Some kids might need entertainment, such as adding an iPod dock, or even just a radio system.

3.2.2 Existing Design #2: Playpen Harness

The Harness Play Pen is a mobility assisting system that utilizes a safety harness and pulley system. The child is secured into a harness and move around within a 10'x10' play area. There is a pulley system that gives assistance to a child by applying additional leverage support for the child to walk. The system allows the child to move freely within the given area[10].

3.2.3 Existing Design #3: The Original Plasma Car

The Plasma Car is a human powered self-propelled toy that is designed for children to move around. It uses the twisting motion of the steering wheel that utilizes the natural forces of inertia, centrifugal force and friction to move the car forward and backwards. The Plasma Car does not require any external power sources and has a durable structure for a child to use safely. The physics fundamentals that the car incorporates allows any user to operate the car quickly [9].



Figure 2 Plasma Car

3.3 Subsystem Level

The main area of focus is on the improvement of the controllability, introduction of power wheels and improvement on the seat efficiency. The controllability can be improved by using microcontroller based systems. Powerful microcontrollers and sensors can be used to design the circuit and improve controllability. Introduction of the power wheels will be helpful for the kids in assisting the steering to drive the vehicle. The power wheels can be used through proper mechanical design and powerful drive motors. The seat ergonomics can be enhanced by understanding the baby sitting posture and design accordingly. The special kids may have certain abnormal body posture and seat efficiency must have to be according to the physical examination of the kids on one to one basis. Some software can be developed that will take the inputs on the kid's physical size and will provide the seat design with parameters.

3.3.1 Subsystem #1: Safety

3.3.1.1 Existing Design #1: PVC Pipe around the car frame

The roll cage is built with PVC pipes mounted around the car frame [8] Figure 3 below is one way of how PVC pipes protect the kid while playing around with the ride-on-car.



Figure 3 Roll cage on a ride-on-car with PVC pipes

3.3.1.2 Existing Design #2: Seat Belt

A seatbelt is the easiest and the most practical safety product a kid can have. It can be bought from the top shelf from any hardware store.

3.3.1.3 Existing Design #3: Body Side Support

It is constructed with foam sheet and can be adjusted. It is a support system for the kid, while it straightens out the body, and also helps with the safety of the child, as shown in figure 4 below [8].



Figure 4 Body Side Support

3.3.2 Subsystem #2: Steering

3.3.2.1 Existing Design #1: Push-button switches of various sizes

With a change of wires, the ride-on-car can be controlled with buttons, shown in figure 5 below. Where the push button switches can be plugged into the connector directly allowing the use of various steering systems [8].



Figure 5 Push Buttons

3.3.2.2 Existing Design #2: Bar handle style with different sizes of PVC pipe

Basic steering-drive system options include a round steering wheel with push-button switches of various sizes and a bar handle style with different sizes of PVC pipe shown in figure 6 below [8].



Figure 6 T-Bar Handle Control

3.3.2.3 Existing Design #3: Joystick

Kids with muscular diseases have a hard time controlling a steering wheel. Where a joystick is the best option to steer a ride-on-car. There are two types of joystick. One which controlled by the arm and the other is controlled by the hands and the fingers. This depends on the kids' ability on what is more suitable and what is more comfortable with how they move their hand. In figure 7 below, is a diagram which is one example of how a joystick could connect to a ride-on-car [6].

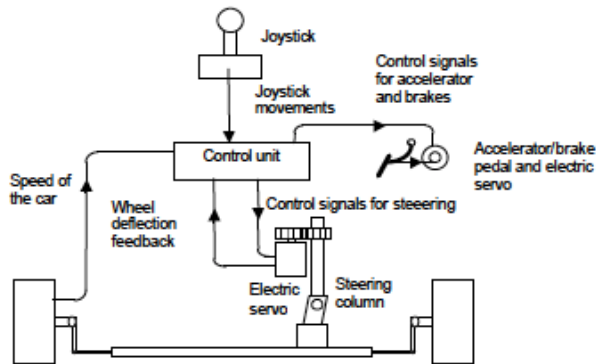


Figure 7 A diagram of how a joystick connect into the car

3.3.3 Subsystem #3: Acceleration

3.3.3.1 Existing Design #1: Lever on a ride-on-car

One idea was to play around with the acceleration lever on the car. Some ride-on-cars have that lever. Where the side of the lever has a screw which can be removed, and with that it plays with speed of how fast the car can go, shown in figure 8 [7].



Figure 8 Joystick in a ride-on-car

4 REFERENCES

- [1] Sam Logan. "Why the time is right for a radical paradigm shift in early powered mobility: the role of powered mobility technology devices, policy and stakeholders". Retrieved 25 September 2016, from <http://www.ncbi.nlm.nih.gov/pubmed/26340446>
- [2] C. Beeler, "Toddlers take the wheel: Harnessing toy cars for mobility," in <http://www.newsworks.org>, Newsworks.org, 2013. [Online]. Available: <http://www.newsworks.org/index.php/local/healthscience/51646-toddlers-take-the-wheel-harnessing-toy-cars-for-mobility>. Accessed: Sept. 26, 2016.
- [3] D. Kukich, "UDMessenger - harness house , Flights of joy," in <http://www.udel.edu>, 2015. [Online]. Available: <http://www.udel.edu/udmessenger/vol21no4/stories/research-harness-house.html>. Accessed: Sept. 26, 2016.
- [4] J. Burnham, "Go Baby Go gets Disabled Children on the move," in <http://www.ccsucares.com>, 2015. [Online]. Available: http://www.ccsucares.com/wp-content/uploads/2015/02/Go-Baby-Go-gets-disabled-children-on-the-move-Central-Connecticut-Communications_-News.pdf. Accessed: Sept. 26, 2016.
- [5] John Hawks Herald . 2016. Toy car steers physical, social mobility for child with disabilities . Feb 9, 2016. The OTTAWA HERALD News. [Online]. [26 September 2016]. Available from: http://www.ottawaherald.com/news/local/toy-car-steers-physical-social-mobility-for-child-with-disabilities/article_c6aacda0-c695-5a7c-ba5f-7505a0bb1527.html
- [6] J. Östlund, "Joystick-controlled cars for drivers with severe disabilities," Swedish National Road and Transport Research institute, 1999.
- [7] Androva1, "Making the Fisher-Price ride-on toy go full speed," in *YouTube*, YouTube, 2010. [Online]. Available: <https://www.youtube.com/watch?v=7WLroaqIjOk>. Accessed: Sep. 30, 2016.
- [8] H. Huang and J. C. Galloway, "Modified ride-on toy cars for early power mobility: A technical report," vol.24, no.2.[Online]. Available: <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC3324847/>. Accessed: Sep. 30, 2016.
- [9] "The original PlasmaCar,". [Online]. Available: <http://plasmacar.com>. Accessed: Sep. 30, 2016
- [10] "Force fields," UD GoBabyGo!, 2015. [Online]. Available: <http://sites.udel.edu/gobabygo/harnesses/>. Accessed: Oct. 1, 2016.